

TEMPORARY TRAFFIC CONTROL TYPICAL APPLICATION

PLACEMENT OF PVMS

NOTES:


THIS TYPICAL ALSO APPLIES TO PVMS PLACEMENT ON OR ALONG A MEDIAN SHOULDER.

PVMS MESSAGES AND PLACEMENT OF THIS DEVICE SHALL BE APPROVED BY THE ASSISTANT DISTRICT ENGINEER-TRAFFIC.

PVMS SHALL BE PLACED A MINIMUM OF 6' AND NO MORE THAN 15' FROM EDGE LINE.

ON LONG TERM PROJECTS PVMS'S SHOULD BE INSTALLED BEHIND TRAFFIC BARRIER.

PVMS PLACED BEHIND THE TRAFFIC BARRIER SHALL BE LOCATED A MINIMUM OF 4' FROM FACE OF BARRIER.

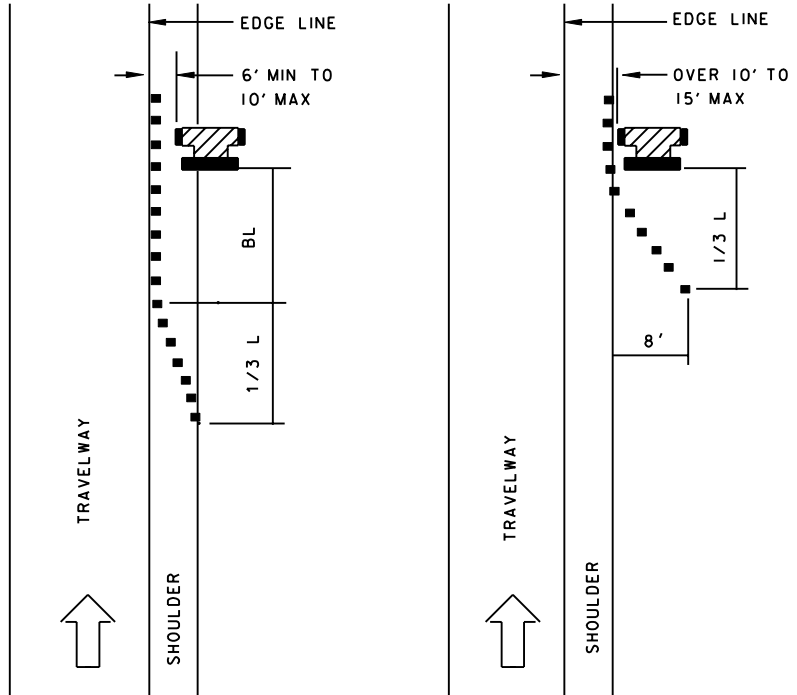


6' TO 10' FROM EDGE LINE

GREATER THAN 10' TO 15' FROM EDGE LINE

KEY:

 PORTABLE VARIABLE MESSAGE SIGN (PVMS)

 CHANNELIZING DEVICES

 DIRECTION OF TRAFFIC

SPECIFICATION CATEGORY CODE ITEMS

APPROVED

DIRECTOR - OFFICE OF TRAFFIC AND SAFETY



APPROVAL • SHA REVISIONS	APPROVAL • FEDERAL HIGHWAY ADMINISTRATION
APPROVAL 8-20-03	APPROVAL 9-23-03
REVISED	REVISED
REVISED	REVISED
REVISED	REVISED

**Maryland Department of Transportation
STATE HIGHWAY ADMINISTRATION**

STANDARDS FOR HIGHWAYS AND INCIDENTAL STRUCTURES

**PORTABLE VARIABLE MESSAGE SIGN PLACEMENT
ALL ROADWAYS/ALL SPEEDS**

STANDARD NO.

MD 104.01-22